


TYPICAL WATTLE INSTALLATION GUIDE

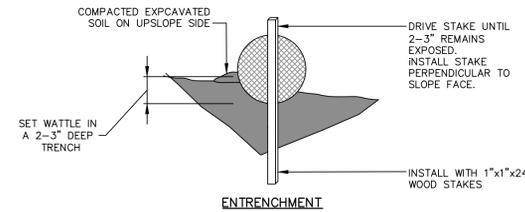


ENTRENCHMENT

NOTES:

1. WATTLES SHALL BE INSTALLED AT LOCATIONS AS INDICATED ON THE DRAWINGS.
2. WATTLES SHALL BE TRENCHED APPROXIMATE 2-3 INCHES AND STAKED SUCH THAT WATTLES DIRECTLY CONTACT SOIL AND PRECLUDE UNDERMINING OR BLOWOUTS. THE TRENCH SHALL BE APPROXIMATELY 9 INCHES WIDE. STAKES SHALL BE DRIVEN THROUGH THE CENTER OF THE WATTLE AT A SPACING OF 3-4 FEET ON CENTER AND NO GREATER THAN 6" FROM THE EACH END OF THE WATTLE. COMPACT SOIL EXCAVATED TO CREATE TRENCH ON UPHILL SIDE.
3. ENDS OF ADJACENT WATTLES SHALL BE TIGHTLY BUTTED OR OVERLAPPED SO THAT NO OPENING EXISTS FOR WATER TO PASS THROUGH. WATTLES SHALL BE FREE OF DAMAGE OR DEFECTS WHEN DELIVERED TO THE SHIPPER. NO VEHICLES SHALL BE DRIVEN OVER WATTLES.
4. WATTLES SHALL BE 12-INCH SEDIMAX-SW12™ MANUFACTURED BY NORTH AMERICAN GREEN, OR APPROVED EQUAL.


WATTLES (12-INCH)

NOT TO SCALE



INDIVIDUAL TREE


NOTE:
SHALL BE IN ACCORDANCE WITH SECTION L.11 OF THE STANDARD SPECIFICATIONS.

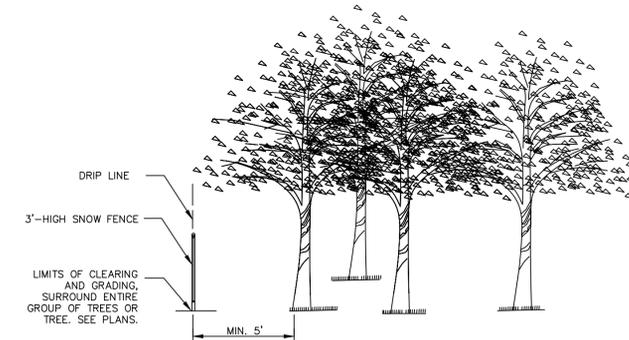

GROUPING OF TREES

TREE PROTECTION

NOT TO SCALE

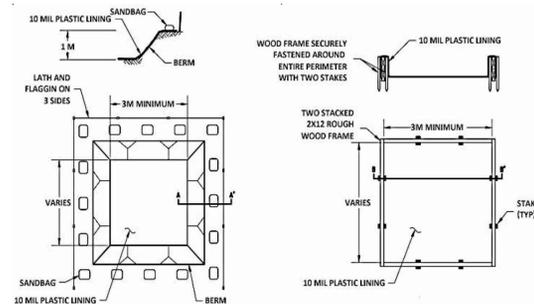

PLAN
NOT TO SCALE
TYPE "BELOW GRADE"
SECTION A-A'
NOT TO SCALE

PLAN
NOT TO SCALE
TYPE "ABOVE GRADE"
WITH WOOD PLANKS
SECTION B-B'
NOT TO SCALE

NOTES:


1. ACTUAL LAYOUT DETERMINED IN THE FIELD.
2. FOR REFERENCE PURPOSES ONLY. NOT FOR CONSTRUCTION PURPOSES.

REFERENCE:

RHODE ISLAND SOIL EROSION AND SEDIMENT CONTROL HANDBOOK, ISSUED 1989 (REVISED 2014)

TEMPORARY CONCRETE WASHOUT FACILITY

NOT TO SCALE

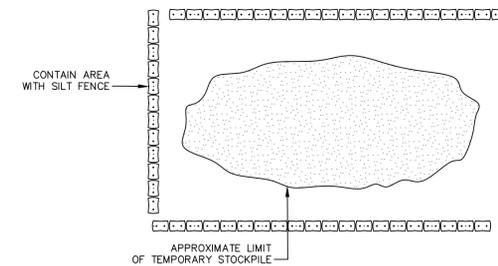

TEMPORARY SOIL STOCKPILE

NOT TO SCALE

SCALE:	HORZ.: AS NOTED
	VERT.: AS NOTED
	DATUM:
	HORZ.:
	VERT.:
	GRAPHIC SCALE

FUSS & O'NEILL
 517 IRON HORSE WAY, SUITE 204
 BARRINGTON, RI 02906
 401.861.3070
 www.fussandoneill.com

TOWN OF BARRINGTON
 DETAILS
 WALKER FARM RECREATION AND
 RESILIENCE IMPROVEMENTS
 BARRINGTON, RHODE ISLAND
 513 COUNTY ROAD

PROJ. No.: 20170585.A10
 DATE: SEPTEMBER 2020


CD-501

No.	DATE	DESIGNER	REVIEWER
1.			




- NOTES:**
1. INTERNATIONAL SYMBOL ACCESSIBILITY SIGN WITH LETTERING NO LESS THAN 1-INCH HIGH BOLTED TO GALVANIZED STEEL TUBE.
 2. REFLECTORIZED 16 GAUGE GALVANIZED STEEL SIGN PANEL WITH PORCELAIN ENAMEL FINISH.
 3. WHITE IMAGE ON BLUE FIELD BEADED REFLECTORIZED TEXTURE, COLOR #15090 FED. STANDARD 595d.


ACCESSIBLE PARKING SIGN
 NOT TO SCALE

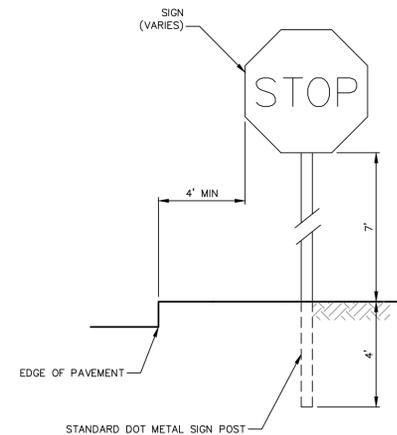

SIGN POST
 (R.I. STD. 24.2.0)
 NOT TO SCALE

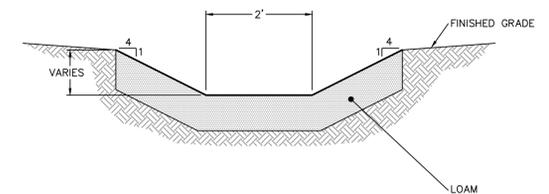


TIDAL RUNNEL
 NOT TO SCALE

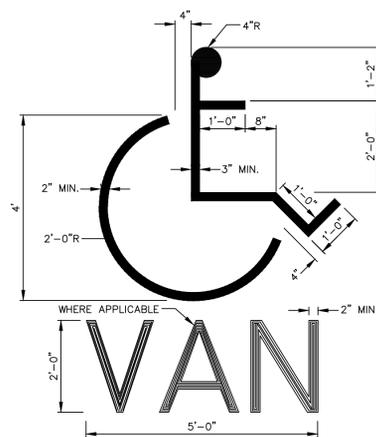


- NOTES:**
1. SYMBOL SHALL BE CENTERED IN THE PARKING STALL.
 2. SYMBOL SHALL BE SOLID WHITE FAST-DRYING WATERBORNE PAINT AND BE CENTERED IN THE PARKING STALL. FOR VAN ACCESSIBLE SPACES, THE WORD "VAN" SHALL BE PAINTED ADJACENT TO HANDICAPPED SYMBOL.

ADA PARKING STALL SYMBOL
 NOT TO SCALE

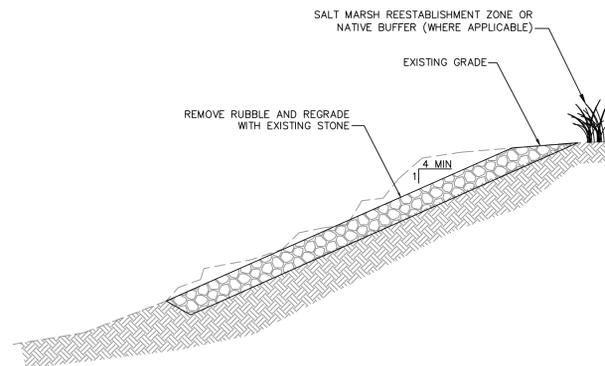

- NOTES:**
1. SEE SITE PLAN FOR PROPOSED ELEVATIONS.
 2. SUPPLEMENT WITH ADDITIONAL STONE AS REQUIRED TO MEET PROPOSED GRADES.

SLOPE REGRADING
 NOT TO SCALE

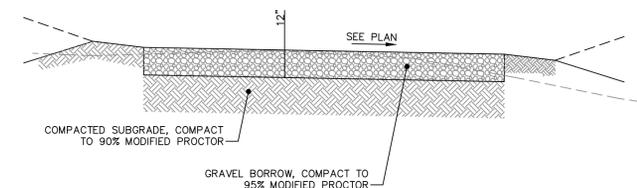

- NOTES:**
1. GRAVEL BORROW SHALL BE IN ACCORDANCE WITH SECTION M.01.09, TABLE 1, COLUMN 1 OF THE STANDARD SPECIFICATIONS.
 1. WHERE APPLICABLE, REMOVE EXISTING TOPSOIL AND SUBSOIL, GRADE, AND COMPACT SUBGRADE.
 2. WHERE EXISTING GRADE IS AT OR BELOW PROPOSED FINISHED GRADES, THE EXISTING GRAVEL BORROW SHALL REMAIN IN PLACE AND BE SUPPLEMENTED WITH ADDITIONAL GRAVEL BORROW TO MEET FINISHED GRADE.
 3. ROAD CROSS-SLOPE SHALL BE 2% AND SHALL MAINTAIN SHEET FLOW TO ADJACENT VEGETATED AREAS.

GRAVEL ACCESS ROAD AND PARKING
 NOT TO SCALE

SCALE:	HORZ.: AS NOTED
	VERT.: 1" = 10'
	DATUM:
	HORZ.: 1" = 10'
	VERT.: 1" = 10'
	GRAPHIC SCALE

FUSS & O'NEILL
 517 IRON HORSE WAY, SUITE 204
 BARRINGTON, R.I. 02906
 401.861.3070
 www.fussandoneill.com

TOWN OF BARRINGTON
 DETAILS
 WALKER FARM RECREATION AND
 RESILIENCE IMPROVEMENTS
 513 COUNTY ROAD BARRINGTON, RHODE ISLAND

PROJ. No.: 20170585.A10
 DATE: SEPTEMBER 2020

CD-502

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER
1.				